

Rec'd PCT/PTO 22 DEC 2004

PCT/AU03/00679



REC'D 17 JUN 2003

WIPO PCT

10/518854

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)


Patent Office  
Canberra

I, JULIE BILLINGSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PS 3196 for a patent by COLOUR VISION SYSTEMS PTY LTD as filed on 26 June 2002.

WITNESS my hand this  
Eleventh day of June 2003

*J. Billingsley*

JULIE BILLINGSLEY  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

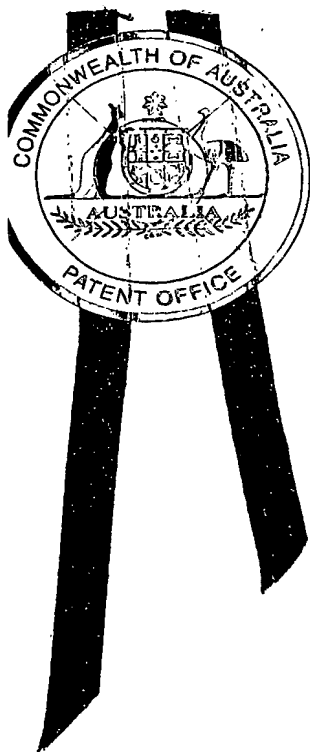

BEST AVAILABLE COPY

AUSTRALIA  
Patents Act 1990

PROVISIONAL SPECIFICATION

**Applicant(s):**

COLOUR VISION SYSTEMS PTY LTD

A.C.N. 007 075 649

**Invention Title:**

FRUIT HANDLING EQUIPMENT

The invention is described in the following statement:

TITLE

FRUIT HANDLING EQUIPMENT

INTRODUCTION

5

This invention relates to fruit handling equipment and more particularly to conveyor systems for use in such equipment.

10 BACKGROUND OF THE INVENTION

Fruit handling equipment conventionally comprises a conveyor that includes a plurality of fruit carrying cups that support fruit that can be transported from one  
15 end of the conveyor to another. It is usual that the fruit is caused to rotate through a photographic zone and is then passed through a weighing zone. A computer sorts the fruit by weight, size and blemish and determines when the fruit should be discharged from the carrying cups to  
20 suitably positioned discharge bins along the length of the conveyor. The cups include a tipping mechanism to effect discharge.

There are a number of patents that disclose this  
25 kind of equipment of which the following contain typical disclosures: Australian patents 649963, 656424, 658686, 696009, 701354.

There is however an ongoing need to improve the  
30 accuracy and efficiency of this type of equipment. The accuracy of weighing fruit is of particular concern. The high speeds at which this equipment operates also lead to potential damage to the fruit or premature discharge that results in the same effect.

35

It is these considerations that have brought about the present invention.

## SUMMARY OF THE INVENTION

According to one aspect of the present invention there is provided a conveying assembly for fruit handling equipment comprising a carriage adapted to be attached to a conveying chain, a cup adapted to support a single piece of fruit, the cup being secured to the carriage via a transversely extending parallelogram linkage, the cup being pivotally secured to the linkage, means to cause the cup to pivot relative to the linkage to effect discharge, the linkage allowing the cup to be displaceable from a conveying position to a weighing position.

Preferably, rollers are positioned adjacent either side of the cup, the rollers being displaceable to an upper position in which the rollers lift the fruit clear of the cup. The assembly preferably also includes means to cause rotation of the rollers to rotate the fruit at the upper position.

20

The rollers are preferably interconnected by a double 'Z' shaped bar that is supported by the carriage to axially pivot to raise/lower the rollers, the support of the bar allowing vertical displacement of the bar.

25

## DESCRIPTION OF THE DRAWINGS

An embodiment of the present invention will now be described by way of example only with reference to the accompanying drawings in which:

30

Figure 1 is a perspective view of a support system that forms part of a conveyor of the fruit handling equipment,

Figure 2 is an end on elevation of one side of the support assembly,

35

Figure 3 is a side elevational view of a series the support assemblies attachment is a conveying chain at

a weighing zone,

Figure 4 is a perspective view of a lower half of a carriage that forms part of the support system,

Figure 5 is a perspective view of an outer component of part of a lower linkage of the support system,

Figures 6A and 6B are perspective views of an inner part of the lower linkage,

Figure 7 is a perspective view of the upper linkage,

Figure 8 is an end elevational view of one half with a cup pivotally tilted,

Figure 9 is an end elevational view of one half of the cup in an eject or fully tilted position, and

Figure 10 is a side elevational view of a series of the assemblies coupled to the chain after a photographic zone.

The accompanying drawings illustrate fruit handling equipment especially for use in the sorting and weighing of fruit such as apples. The fruit handling equipment comprises an endless conveyor on which is clipped a series of carriages 20. Each carriage 20 supports a fruit carrying cup 30 on each side. Each carriage 20 also supports rollers 70 on each side that can lift the fruit clear of the carrying cups 30 and rotate the fruit past a camera in a photographic zone (Fig. 10) allowing the fruit to be viewed for size and blemish. The conveyor also includes a weighing zone (Fig. 3) in which the fruit carrying cups pass over a load cell W. A solenoid (not shown) can be activated to cause the fruit carrying cups 30 to tip (Fig. 9) to eject selected fruit off the conveyor. The conveyor is run by a computer that ensures that the fruit is sorted by size, weight and blemish at high speed as it moves along the conveyor.

Equipment of the kind described above is

disclosed in a number of the applicant's earlier patents including AUB 658686 and 696009.

5 In the system shown in Figure 1 that is the  
subject of this application each carriage 20 includes a  
rectangular platform 80 with a pair of downwardly  
extending legs 21, 22. The underside of the platform  
supports a chain clip 23 that allows the carriage to clip  
onto the chain (not shown) of a conveyor. Each leg 21,  
10 22, supports a T-shaped support cup 30 via a transversely  
extending parallel linkage 40. By transverse it is  
understood that the linkage comprises an upper linkage 41  
and lower linkage 42 that extend transversely of the  
conveyor or perpendicular to the line of travel.

15 Each T-shaped cup 30 comprising a dished recess  
31 bordered by five arcuate fingers 32 spaced to define  
gaps 33 therebetween. The dish shaped cup 31 is supported  
by a downwardly extended central post 35. The post  
20 terminates in a lower abutment surface 36 and is pivotably  
secured to the lower linkage 42 about a pivot point 37 and  
to the upper linkage 41 throughout pivot point 38.

As shown in Figure 1, the upper linkage 41  
25 comprises an elongate bar 43 with a forked end 44 that is  
pivotably secured about the pivot point 38. The bar 43  
supports a transverse beam 45 that is pivotably mounted  
across projecting flanges formed on the leg 21 or 22.

30 The lower linkage 42 is illustrated in greater  
detail in Figures 5 and 6 and comprises an inner arm 51  
(Figure 6) that is pivotably supported by the flanges of  
the leg 21 of the carriage 20. The arm 51 has a pair of  
projecting parallel webs 52, 53 each having downwardly  
35 projecting legs 54 and 55. The webs are pivotably secured  
to either side of an outer linkage 56 (Figure 5) that has  
a central body portion 57 with projecting webs 58, 59 that

are pivotably secured to either side of the lower pivot point 37 of the post 35. The body portion 57 includes a downwardly extended abutment 60 and a pair of stops 62 on either side of the front face of the forward end. As  
5 shown with particular reference to Figures 1 & 2 the inner arm 57 and outer linkage 56 operate as an elbow. When in the position shown in Figures 1 & 2, the legs 54, 55 abut the stops 62 and the linkage assumes a straight extended position. As shown in Figure 8 when the abutment 60 is  
10 contacted by a solenoid (not shown) it causes the outer linkage 56 to move inwardly and upwardly towards the carriage 20 to reduce the effective length of the linkage 42 causing the lower end of the post 35 to move inwardly towards the carriage causing the fruit carrying cup to tip  
15 outwardly to ultimately assume the position in Figure 9 in which the forward end 46 of the frame 43 abuts a stop 47 on the underside of the platform. In this position the cup 30 is at an angle of 45° to the vertical and the contents have been ejected. To return the cup to the  
20 vertical position the underside of the cup recess 31 rides up a ramp (not shown) that has the effect of pushing the cup up to the vertical. At the same time the legs 54, 55 of the inner arm 51 of the lower linkage 42 latch against the stops 62.

25

Figure 1 also illustrates the location of a pair of rollers 70 on a double Z-shaped bar 71 that it clipped across the carriage platform 80. The free ends or stub axles 72, 73 of the bar 71 extend transversely from the  
30 carriage and the rollers 70 are in the form of spaced concentric discs 75 with tapering peripheries. The tapering peripheries of the discs 75 are aligned with the gaps 33 between the fingers 32 of the carrying cups 30 as shown in Figure 2. As shown in Figure 10 the rollers 70  
35 are arranged to ride up a ramp 76 which causes the bar 71 to pivot about the platform 80 to lift the rollers through the gaps 33 between the fingers 32 to lift the fruit

carried on the cup clear of the cup 30. As shown in Figure 10, the rollers 70 on the adjacent carriage 20 would extend through the right hand side of the carrying cup 30 so that each side of the cup is engaged by the roller peripheries.

The double Z-shaped bar 71 results in the stub axles 72, 73 being parallel but offset to the central position 77 that is supported by the upper surface of the carriage platform 80 as shown in Figure 4. The support for the rollers is a single support on the extreme edge at both sides of the carriage. The central portion 77 of the bar locates within elongate slots 78 with arcuate ends 79 formed in the upper surface 81 of the carriage base 80. The location of the central portion 77 of the bar 70 allows it to pivot along its axis but also provides a degree of vertical movement (preferably 3mm or 4mm) to accommodate distortions in the assembly that might cause the roller 70 to lift clear of the ramp 76 on one side when lifted by the ramp on the other side. The slight tilting of the bar due to the vertical movement ensures that the rollers remain on the ramps on each side of the conveyor.

Figure 10 is a side view of the conveyor with the rollers 70 in the upper position driven upwardly by ramps 76 on each side of the conveyor to cause the rollers 70 to project through the gaps between the fingers 32 of the conveying cups 30 to lift the fruit clear of the cups. The frictional content of the roller peripheries with the ramps 76 cause the rollers to axially rotate which has the effect of causing the fruit to rotate. Although not shown, the fruit move through a photographic zone where they are filmed as they rotate by a CCD camera. When the conveyor moves the fruit past the photographic zone the fruit remain rotating on the rollers 70 that engage the ramps 76. However as shown in Figure 10 a stabilising



ramp 90 then supports the stub axles 72, 73 of the rollers 70. Once the rollers 70 have been supported by their stub axles 72, 73 by the ramp 90 they effectively become disassociated with the driving ramp 76 and slowly free-wheel to a stationary position whilst supported on the stabilising ramps 90 that engage the stub axles. The stabilising ramp 90 as shown in Figure 10 diverges downwardly to lower the rollers 70 to an inoperative position as shown on the right hand side of Figure 10 in which the fruit are again supported by the cups 30. The subsidiary ramp 90 has the effect of causing the rollers to cease rotating which reduces the likelihood of the fruit bouncing off the cups. Thus when the fruit are lowered onto the cups to be weighed as shown in Figure 3 they are not rotating and are less likely to bounce off the cups 30.

To weigh fruit carried in the cups 30 the rollers 70 assume the lower position shown in Figure 3 in which there the peripheries are well clear of the underside of each cup 35. The abutment 36 at the end of the post 35 of each cup 30 rides up a ramp R onto a weighing cell W. This causes the cup 30 and linkage 40 to pivot through a small vertical movement causing the post and linkage 40 to disengage from the stop 47 on the underside of the carriage platform 80. In this way, the parallel linkage ensures that there is no component of the horizontal movement in the vertical component that is interpreted by the load cell. The fact that the linkage is a parallelogram allows the load to be borne by the load cell W on a single abutment 36 of a reduced cross-section. This improves the accuracy of the weighing. However, the use of a transverse parallel linkage avoids the need to ensure that the linkage is horizontal or parallel to the load surface. In a longitudinal linkage any deviation from the horizontal or parallel introduces vertical components that distort the load reading and reduce the

accuracy. A transverse linkage does not have this constraint and is thus easier to tolerance and set up.

Dated this 25th day of June 2002

5 COLOUR VISION SYSTEMS PTY LTD


By their Patent Attorneys

GRIFFITH HACK

Fellows Institute of Patent and


Trade Mark Attorneys of Australia



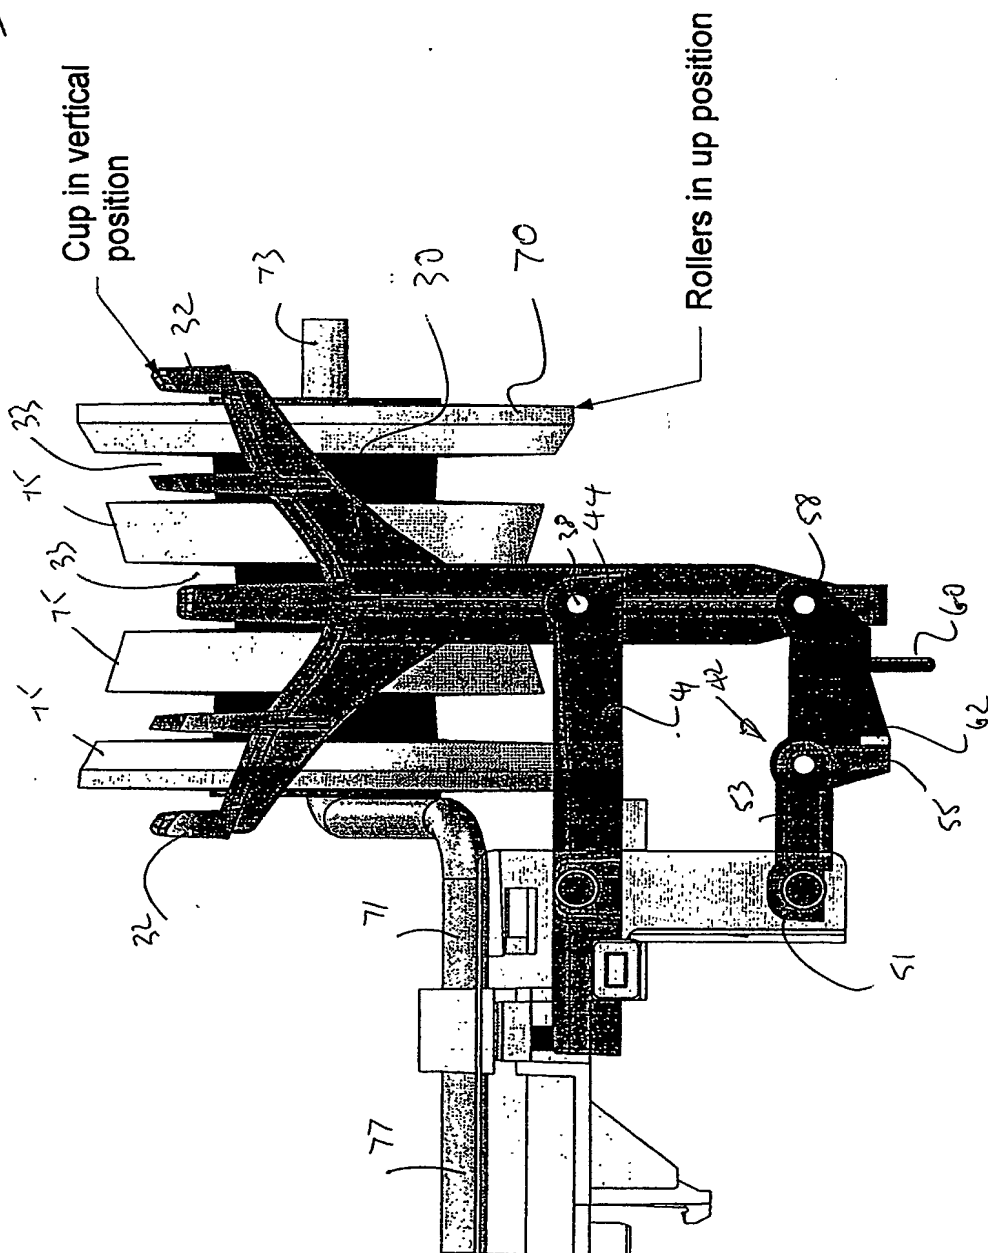

E		A3	General Tolerances acc to :					
		Scale	ISO 2768-1 medium	Drawn	TS	Checked I.MADDEN	Dat.	Dat
<b>COLOUR VISION SYSTEMS</b> 				<b>Title</b>				
				Doc.Nr 1000 0000 0000				

Fig 3

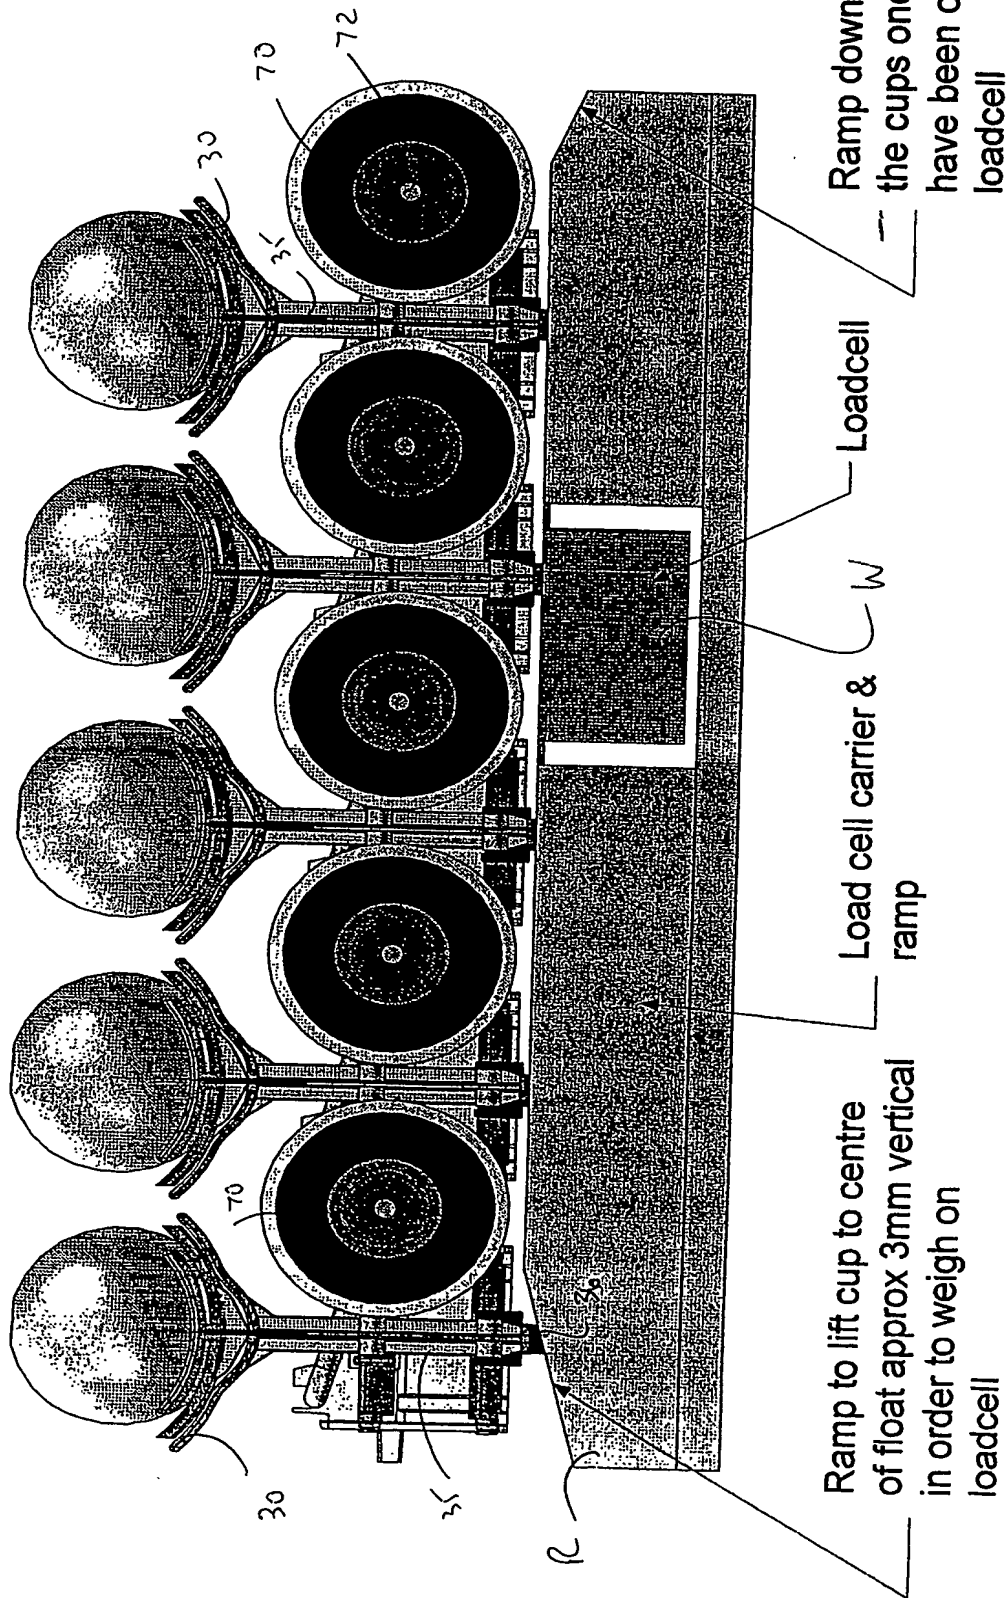



E	A3	General Tolerances acc to:		Drawn	TS	Checked I.MADDEN	Dat.	Dat
		Scale	ISO 2768-1 medium					
		 COLOUR VISION SYSTEMS		Title				
				Sheet 1		Rev.		
						Doc.Nr		1000 0000 0000

FIG. 4

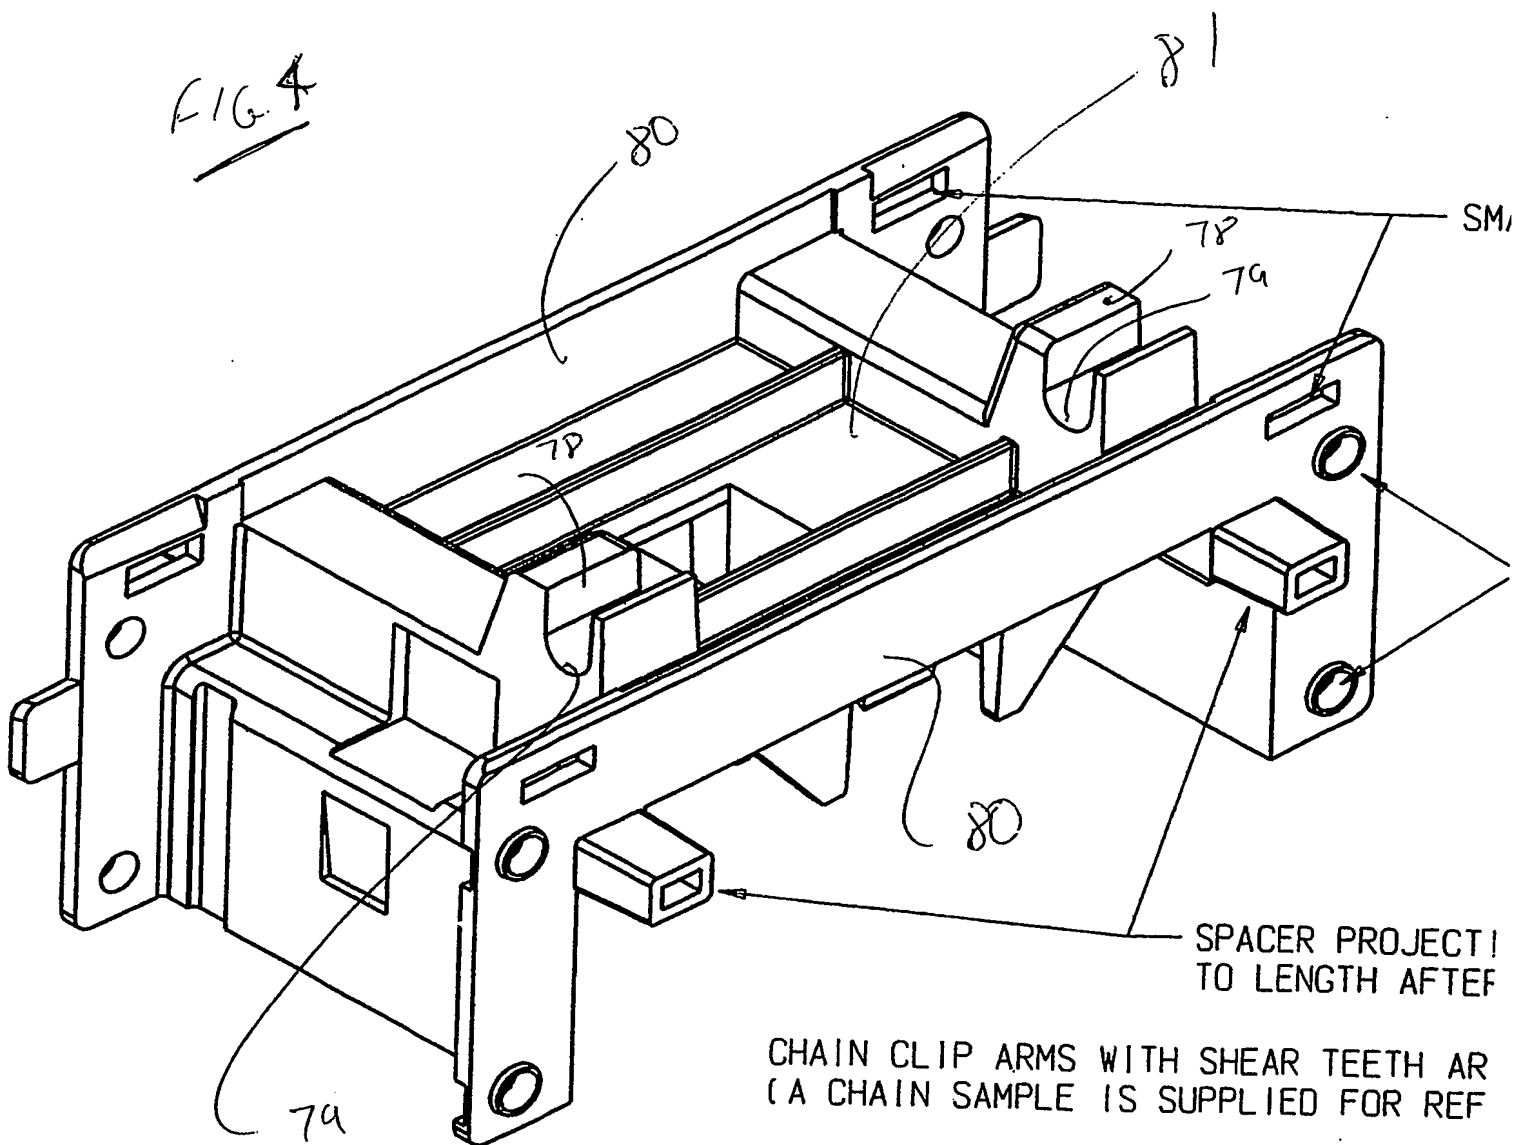


FIG 5

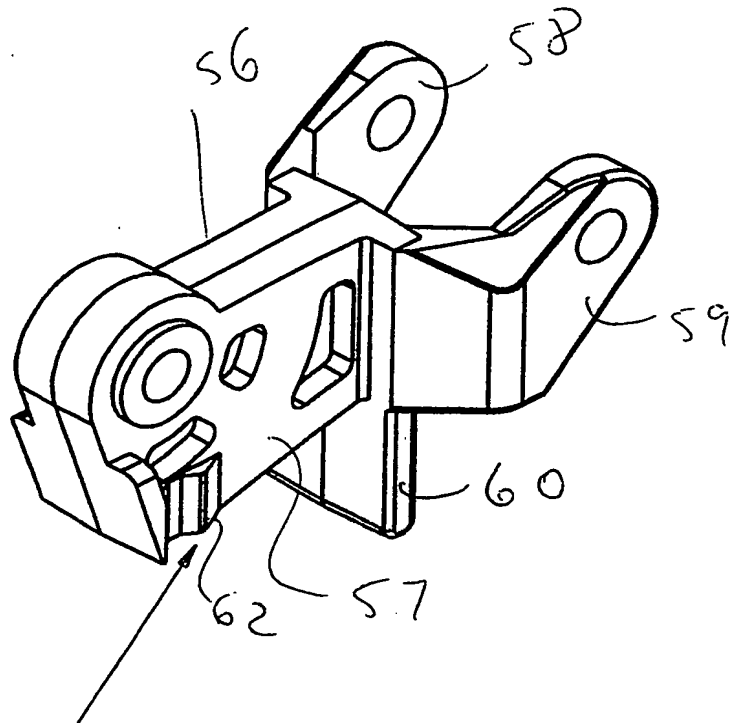


FIG 6A

25.00


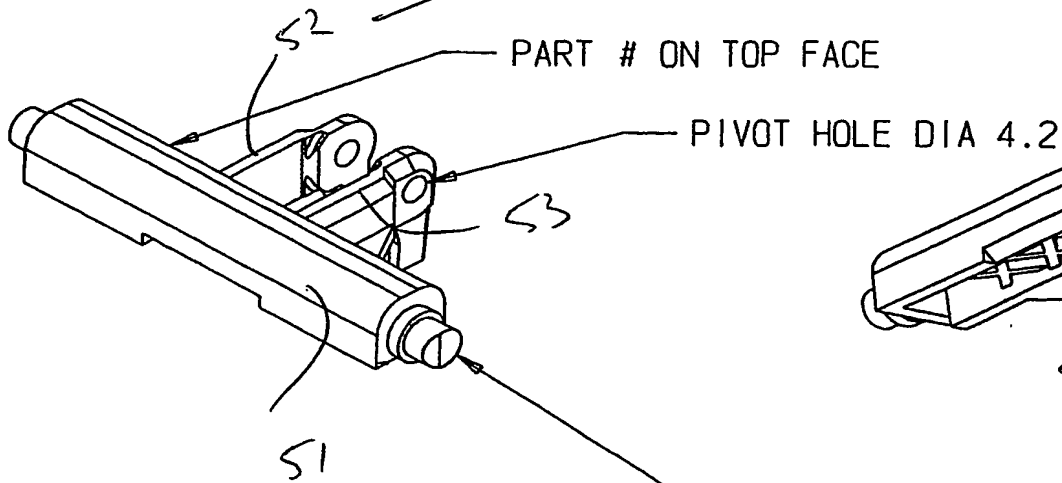


FIG 6B

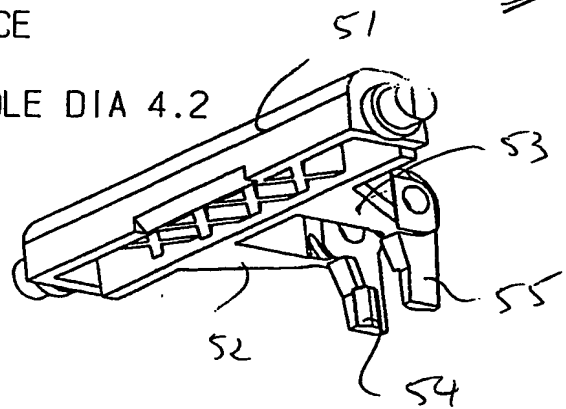

PIVOTS TO BE FORMED USING SLIDES

FIG 7


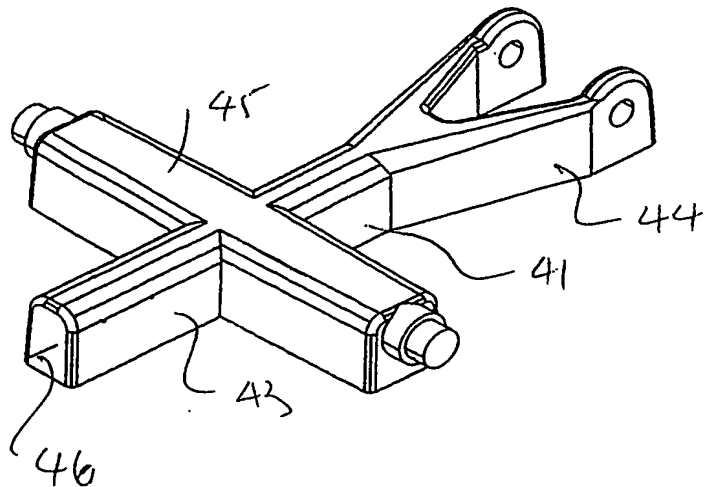



FIG. 8

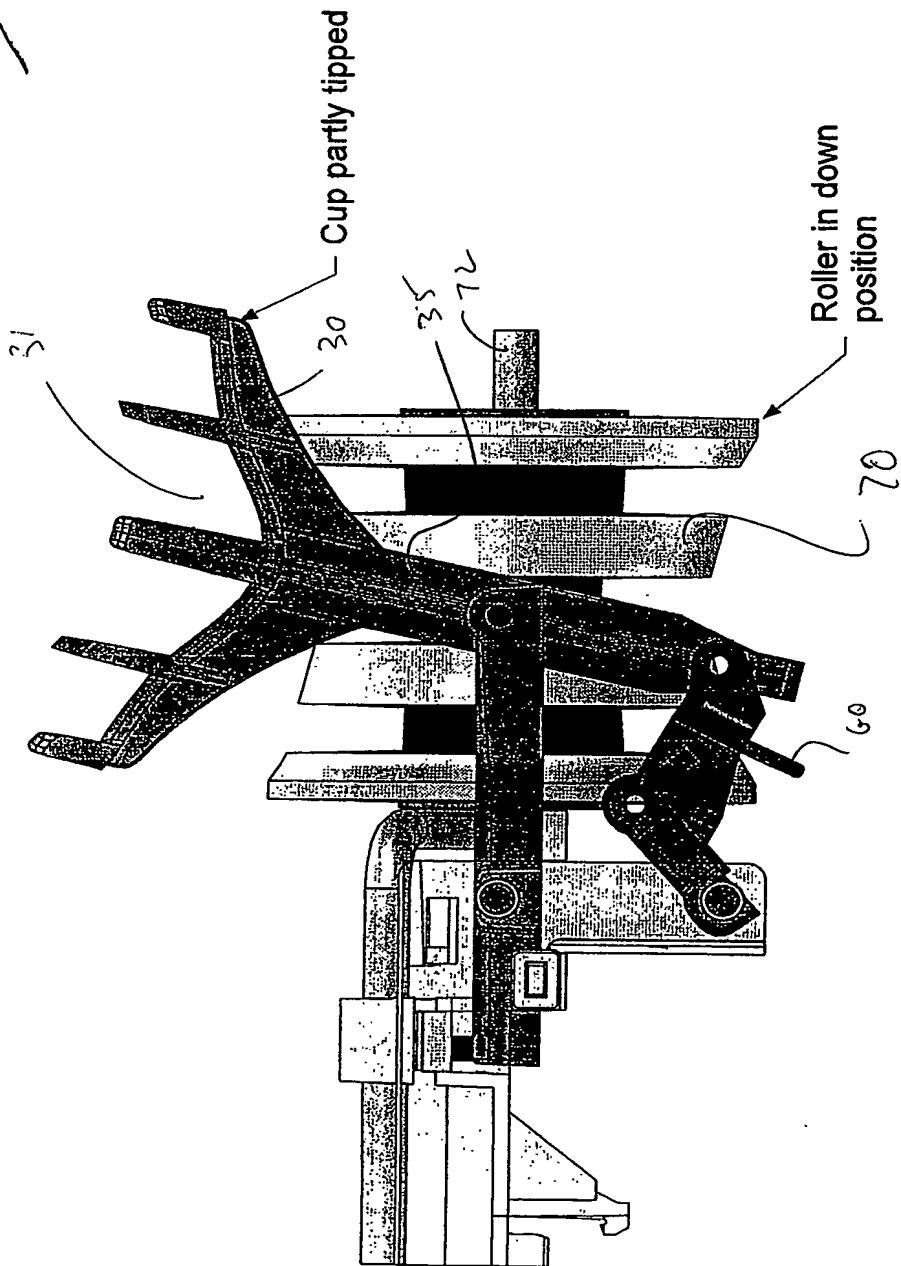

E		A3	General Tolerances acc to : ISO 2768-1 medium	Drawn	TS	Checked I.MADDEN	Dat	Dat	Sheet 1	Rev.
		Scale								
COLOUR VISION SYSTEMS				Title						
Colour Vision				Title						
				Doc.Nr 1000 0000 0000						




fig. 9.

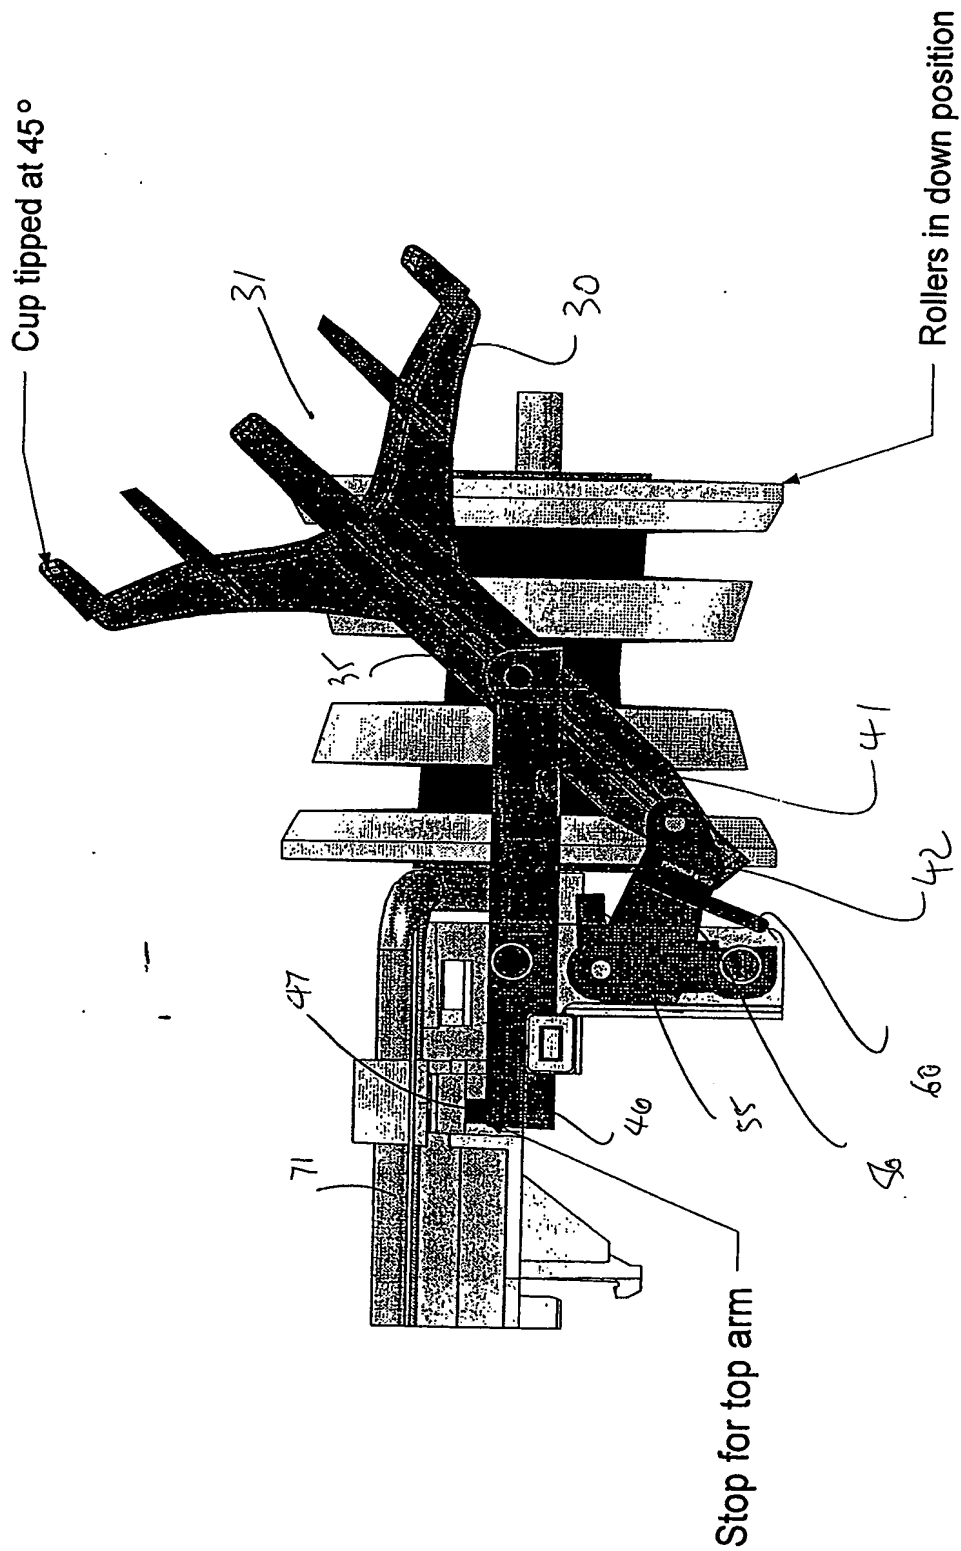


E		A3	General Tolerances acc to : ISO 2768-1 medium	Drawn TS	Checked I.MADDEN	Dat. Dat	Sheet 1 / Rev. Doc.Nr 4000 0000 0000
		Scale					
COLOUR VISION SYSTEMS				Title Title			

A690

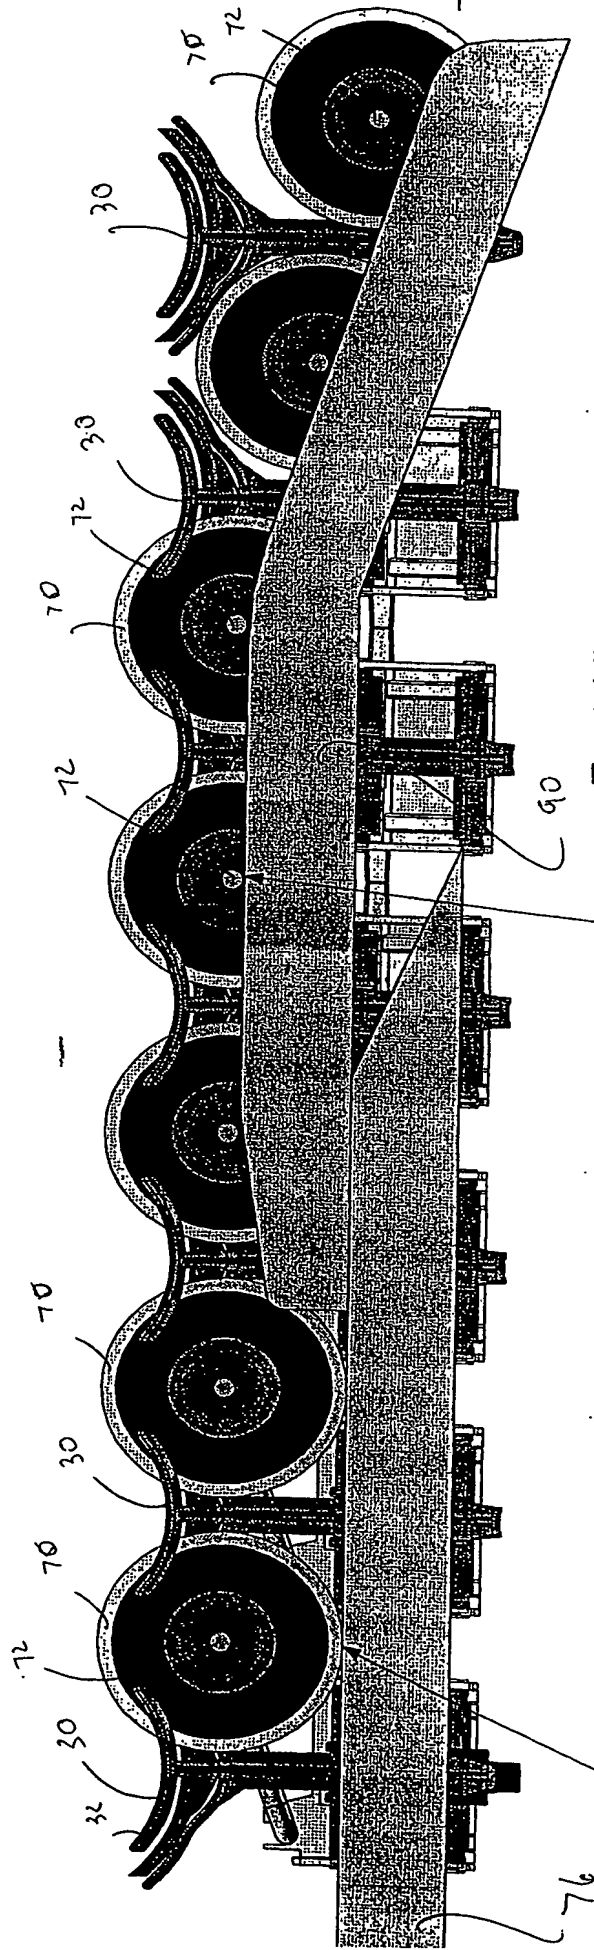

To stabilise fruit prior to load cell the rollers leave contact with the rotation ramp & the shaft comes in contact with a fruit stabilising ramp. Rollers then fall away leaving the fruit in the cup for weighing.

Rollers are in contact with this ramp prior to camera box & thru camera box for fruit rotation.

E	A3	General Tolerances acc to :		Drawn	TS	Checked I.MADDEN	Dat	Dat
		Scale	ISO 2768-1 medium					
		Title <b>COLOUR VISION SYSTEMS</b>						
Colour Vision				Sheet 1		Rev.		Doc.Nr

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**